BSR 2.0
ELECTRIC POWER

7kW

POWER UNIT

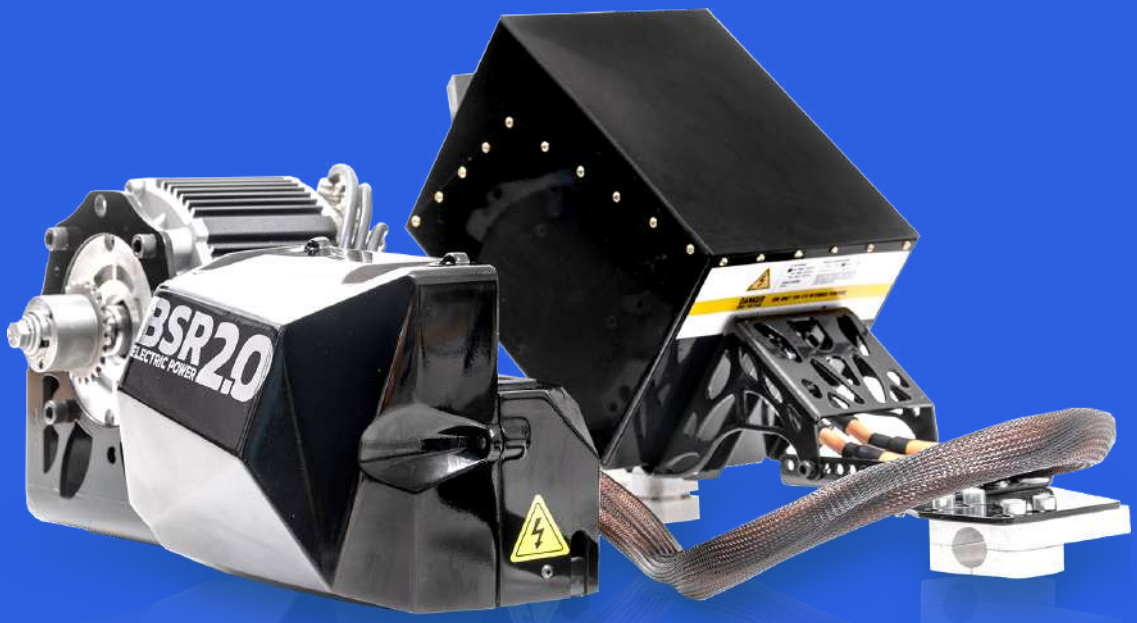

BSR 2.0 POWER UNIT PERFORMANCE

Motor Power:	7kW (9.1 Hp)
Motor Torque:	30Nm
Rear axle torque:	52.5Nm
Gear ratio:	1:1.7 (40T/70T/219)
Motor RPM range:	3200 RPM
Top Speed:	up to 90km/h
Acceleration from 0-60km/h:	~4.0 sec.
Throttle:	Hall sensor (dirable)
Cooling:	Air
Battery:	Li-Ion with BMS and fizical fuse protection
Driving range:	18+ min (real life test results)
Charger:	AC (90-240V) to DC (48V) (optional DC to DC for solar charging)
Charging time:	30-60 min
Weight of complete unit:	28,9 Kg (included battery)
Warranty:	2 years unlimited driving hours
IP level:	64
Others:	All the mounting parts and bolts are included in the package

Price (including battery):	3'800 Eur
Extra battery:	1'800 Eur
Extra charger:	350 Eur

** All Prices Excluding VAT*

Included in Power Unit:	ELECTRIC MOTOR, CONTROLLER, BATTERY, CHARGER, BUTTONS, WIRING, MOUNTING PARTS, COVERS, BOLTS, INSTALLATION INSTRUCTION.

BATTERY

- Quick swap system, replace it in less than 30 seconds
- 2x BMS and physical fuse protection
- Air cooling (aluminum radiators)
- Capacity 35Ah (standard) / 42Ah (optional)
- Discharge peak 300A (continuous 200A)
- Charging power till 2kW (40A / 48V), 1,2-1,5kW standard
- Weight 10,5 – 11,5 Kg (depends on capacity model)
- 2 years unlimited cycle warranty
- Buy Back with 25% of price after warranty
- Maintenance service after warranty time

MOTOR

- PMSM brushless motor
- Continuous power 7kW
- Air cooling
- Operating voltage 48V
- RPM max 3200
- Weight 17,4 Kg
- Motor efficiency 92%
- 2 years unlimited warranty
- Maintenance service after warranty time

CHARGER

- AC to DC with all type of AC plugs
- Charging voltage 48V (nominal)
- Charging power 20A (standard) / 30A and 40A (optional)
- Air cooling (aluminum radiators)
- 100% Automated system (with LED indicators)
- Weight 2,5 – 5,5 Kg (depending on model)
- 2 years unlimited warranty
- Maintenance service after warranty time

POWER CURVE

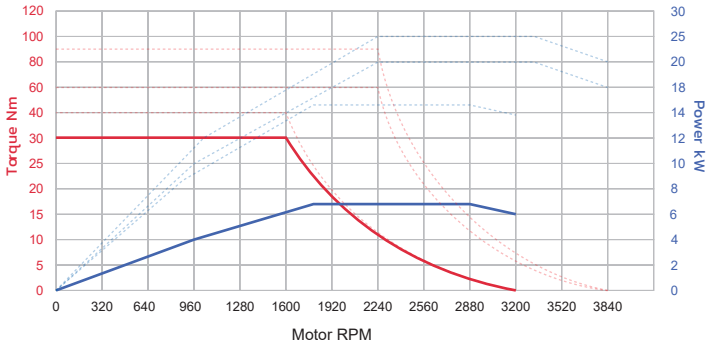

- Instant torque 30Nm
- Best performance up to 3200 RPM
- Top speed: up to 90 km/h
- Throttle response Linera
- Regenerative braking (optional)

MORE INFO

BSR 2.0 Power Units are designed so that they can be quickly and efficiently installed on any chassis instead of the standard internal combustion engine within 10-15 minutes without additional equipment and knowledge.
All that must be taken into account is the location of fastening and the dimensions of the components. Fastenings are designed so that they can be adapted to different chassis. It is possible to develop specific fastenings on request.

OTHER OPTIONS

7kW

KIDS

15kW

KIDS/JUNIOR

20kW

JUNIOR

25kW

SENIOR

Blue Shock Race Ltd.
Reg.Nr.:LV42103069876
Brivibas street 113, Liepaja, LV
info@blueshockrace.com

WWW.BLUESHOCRACE.COM